CS 969

AUTOMATIC DOUBLE MITRE SAW 45°

Horizontal cutting stroke | Wide & High Cuts | Horizontal & Vertical Clamps | No wastage | Cast concrete base | Meets new EU H&S (<0,1mg/m3)

Type of material
The CS 969 can cut wood, MDF and plastic mouldings

Designed for
Bespoke Framer | Retail Framer | Medium Contract | Volume Framer

Air supply
6 bars
2Nl / cycle

Electric supply
220V (+5%) triple phase (16A)
380V (+5%) triple phase (10A)

Motors' features
2 motors | 1.5kW, 2hp, each | 2,800 rpm (50 Hz) | 3,400 rpm (60 Hz)

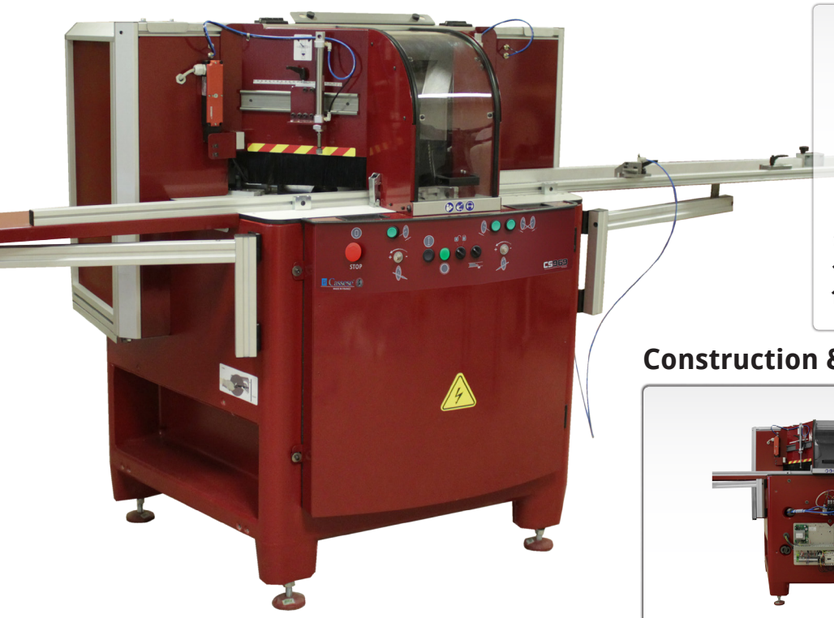

BUREAU VERITAS
EC TYPE-EXAMINATION CERTIFICATE
N°0062/5032/014/09/15/0018

MADE IN FRANCE

Cutting features



Wider & Higher cuts
160mm (6 5/16") wide
110mm (4 11/32") high

Horizontal cutting stroke
Improves quality of cutting even on very delicate mouldings



Unique «raised blade stroke»
Allows a cutting angle towards the interior of the profile, eliminating the possibility of chipping and bad finishing

4 pneumatic clamps
2 horizontal + 2 vertical clamps to secure and flatten the mouldings if bent



No wastage
Because the blades cut alternately, the waste is effectively nil, which will save meters of mouldings



Additional pneumatic & retractable measuring stop
For a quick switch between short & long cuts

Construction & engineering features

Solid build & heavy duty design
Weighing 720 kg, CS969 is engineered with a focus on durability, reliability and safety

Cast concrete base
Absorbs all vibrations for absolutely perfect cuts



Cast aluminium cutting head
Avoids any disadjustment or «play» of parts for an everlasting reliability



Ducted extraction at blades
This dramatically reduces dust by extracting it at the source : the blades



Oversized blade collars
To eliminate any possible blade flex and get perfect and accurate cuts



Reinforced bearings
For high quality cuts and durability

Safety features

HEALTH AND SAFETY BY CASSESE

CE approved
Meets the new EU Health & Safety regulation for dust collection (<0,1mg/m³)



Ergonomic & safe
Large front window for an optimal view of the cutting & 2-button operation to keep hands away from the cutting area

Convenient blade-change system
Blades can be easily positioned for safe and comfortable access

Removable rear casing
Allows a quick & complete access to the inside of the machine for a safe & easy servicing

Cutting Capacity (mm)



Dimensions	
Length	3,400 mm
Width	1,060 mm
Height	1,346 mm
Weight	621 kg

Dimensions (mm)

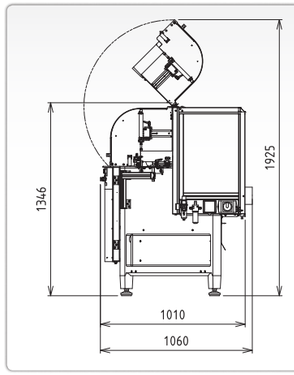

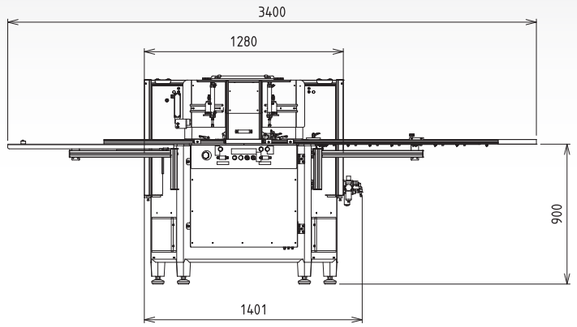

Included Accessories

Premium noise reduction carbide blades 350mmØ - 14" (Z1570)



1,5m (59") measuring and support arms

Optional Accessories

Additional right-hand measuring arm :
-Z28431 for 1m (40")
-Z28432 for 2m (80")



Special clamp for aluminium and thin mouldings (Z19147)

SmartStop™ digital automatic measuring stop (Z28600). Measuring capacity of 2m (80")

Extension of 1m (40") for SmartStop™ (Z18220)



Programmable vertical clamps for SmartStop™ (Z24250)

Barcode reader for SmartStop™ (Z21476)